

# S/W Monitor



Daten


Typ PM-J12/17/20

Ikegami

Model	9"	12"	15"	17"	20"
CE/FCC/FDA	✓	✓	✓	✓	✓
Picture Tube	9"	12"	15"	17"	20"
Video I/P CH	1			2	
AC Power Consumption	AC/110/117V on 60Hz AC/100/220/230/240V on 50 Hz (Optional)				
Power Consumption	25W	30W	42W	40W	65W
Input Signal	0,5~2,0Vp-p Composite Video Sync. Negative				
Input Impedance	75 Ohm or High-Impedance (Switchable)				
Band Width	100Hz-10MHz (-3dB)				
Video Gain	30dB				
Resolution	Center:1000 Lines Corner:800 lines			900 lines	
Linear Distortion	Horizontal:15%MAX, Verical:10%				
Operation System (EIA)	Horizontal:15750 Hz Vertical:60Hz				
Operation System (CCIR)	Horizontal:15625 Hz Vertical:50Hz				
Front Panel Controls	Power ON/OFF/H-HOLD/V-HOLD/BRIGHT/CONTRAST				
Operation Temperature	-10°C~55°C				
Rear Controls	V-SIZE V-LINEAR SUB-BRIGHT FOCUS				
*Audio Input Signal	10~150mvp-p				
*Audio Output Signal	0,5W Ohm at 10% THD		1,5W at 10%THD		1,5W/8 Ohm at 10%THD
*Speaker Impedance	16 Ohm		8 Ohm		
Dimensions WxHxD	10"x9,3x8,9" (252x235x225)mm	12,2"x12,2"x12,2" (310x310x308)mm	14"x13,4"x14,6" (355x340x370)mm	16,3"x15,8"x16" (412x400x405)mm	18,9"x16,4"x14,3" (412x400x405)mm
Net/gross Weigh	6,2Kgs/6,8Kgs	9,5Kgs/10,5Kgs/10Kgs/11Kgs	14Kgs/15Kgs	16Kgs/17Kgs	18,04Kgs/20,72Kgs
Packing	2PC/CTN/2,17'	2PCS/CTN/4,08'	1PCS/CTN/2,77'	1PC/CTN/3,90'	1PC/CTN/5,94'

Design and Specifications are subject to change without notice.

\*Audio I/O(Optional)

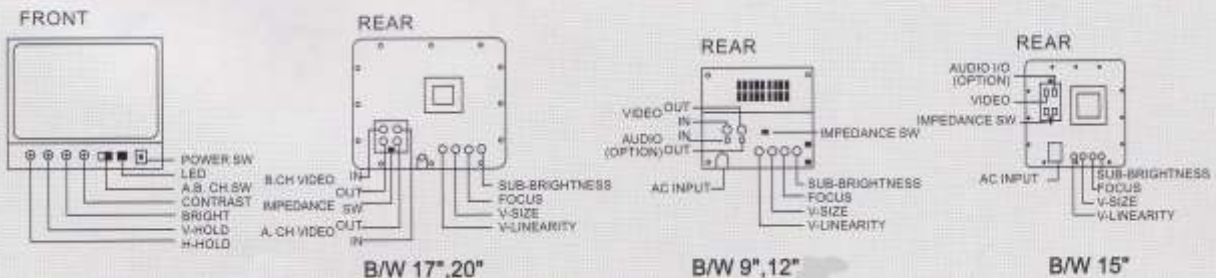

Modell und technische Änderungen vorbehalten

